
# Sensor Selection Guide

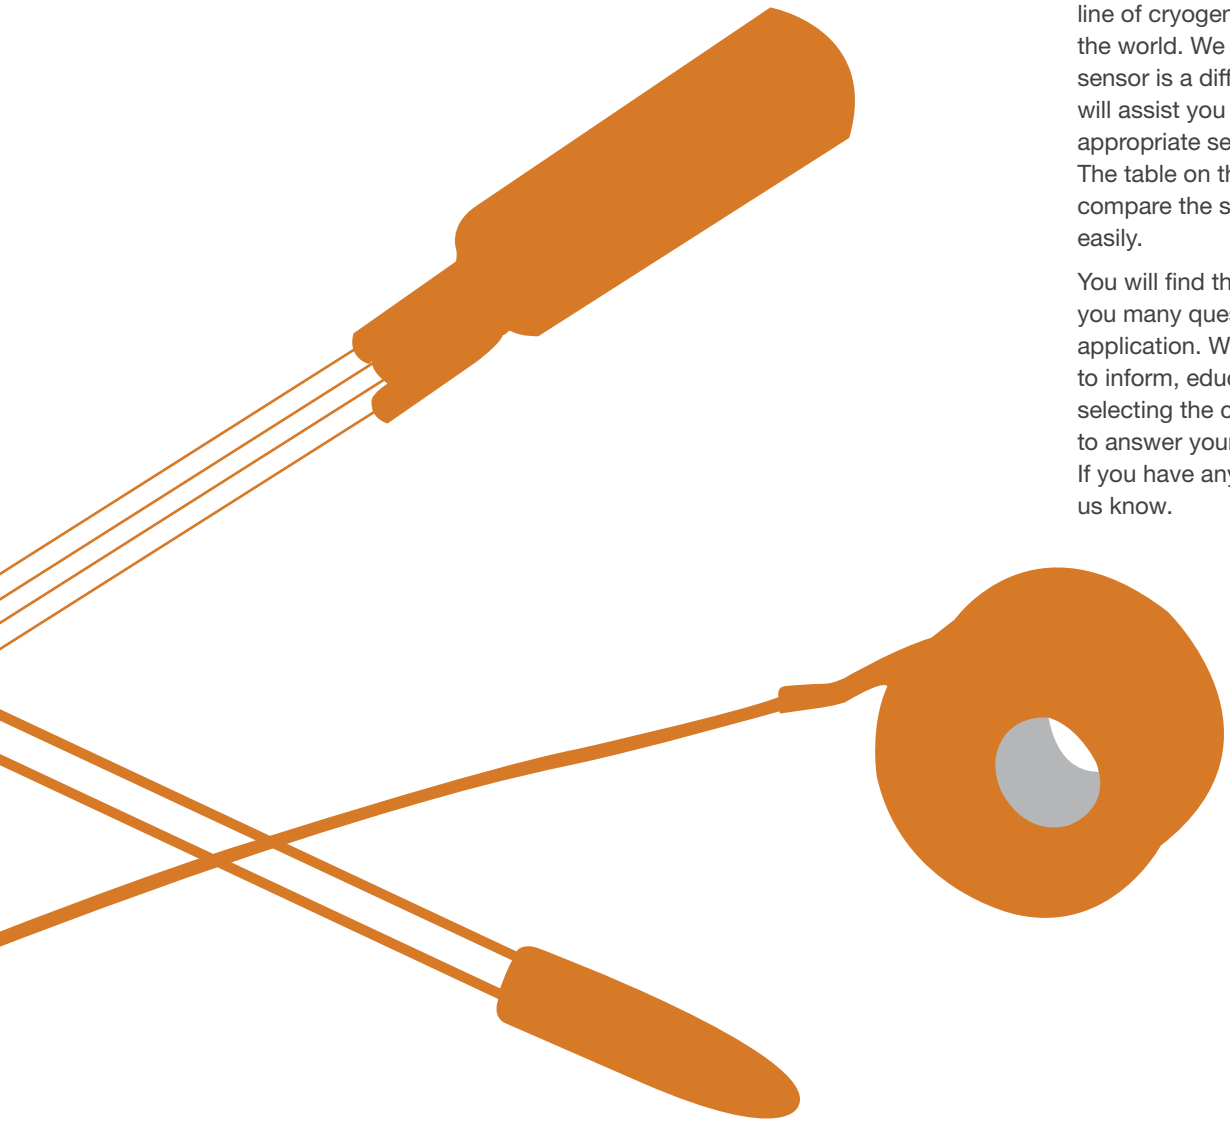

**How to select a temperature sensor for your application**

Lake Shore offers the most comprehensive line of cryogenic temperature sensors in the world. We understand that selecting a sensor is a difficult procedure. This catalog will assist you in selecting the most appropriate sensor for your application. The table on the next page is designed to compare the sensor characteristics more easily.

You will find that our sales staff will ask you many questions regarding your application. We ask a lot of questions to inform, educate, and to assist you in selecting the correct sensor. We are here to answer your questions and concerns. If you have any specific needs, please let us know.

Any one or several of the following environmental factors may be important to you in selecting a sensor:

- Temperature range
- Package size
- Fast thermal response time
- Fast electrical response time
- Heat sinking
- Small thermal mass
- Robustness
- Compatibility with harsh environments
  - Magnetic fields
  - Ionizing radiation
  - Ultra high vacuum (UHV)
  - Vibration/mechanical shock
  - Thermal shock
  - Temperatures above 323 K
- Easily measured signal
- Compatibility with sources of error
  - Thermal EMFs
  - Self-heating
  - Noise pickup
- High sensitivity
- High accuracy†
- High repeatability—long and short term
- Low power dissipation
- Interchangeability
- Ease of use
- Low cost
- Available accessories
- Available instrumentation

**Sensor overview**

| | Temperature range | Standard curve | Below 1 K | Can be used in radiation | Performance in magnetic field |
|---|---|---|---|---|---|
| Diodes | | | | | |
| Silicon | 1.4 K to 500 K | × | | | Fair above 60 K |
| Positive temperature coefficient RTDs | | | | | |
| Platinum | 14 K to 873 K | × | | × | Fair above 30 K |
| Negative temperature coefficient RTDs | | | | | |
| Cernox® | 0.10 K to 420 K | | × | × | Excellent above 1 K |
| Germanium | 0.05 K to 100 K | | × | × | Not recommended |
| Rox™* | 0.01 K to 40 K | × | × | × | Good below 1 K |
| Other | | | | | |
| Thermocouples | 1.2 K to 1543 K | × | | | Fair |
| Capacitance | 1.4 K to 290 K | | | | Excellent |

*RX-102B not recommended for use in magnetic fields

Unfortunately, you can't have it all in one sensor. The most stable and accurate temperature sensors are very large, have slow response times and are extremely fragile. The sensors with the highest sensitivity and resolution have the smallest range. Choosing the appropriate sensor for a particular application necessitates prioritizing the requirements for that application.

The sensors described in this catalog are manufactured for the rigors of cryogenic environments, and are designed with specific applications in mind. For much of its history, Lake Shore has focused on cryogenic sensors used for the precise measurement of temperatures from near absolute zero to well above room temperature.

As you continue through the Sensor section of the catalog, you will notice that information is presented in both graphical format as well as in more detailed specifications, pertaining to topics such as the sensor's highlights, typical magnetic field-dependent data, resistance, and sensitivity values.

Characteristics such as packaging are incorporated into each sensor's design with the customer in mind. To learn more about what package would be best for your application, please refer to the Sensor Packages and Mounting Adapters section. For more detailed information, see Appendix C.

† The use of the terms accuracy and uncertainty throughout this catalog are used in the more general and conventional sense as opposed to following the strict metrological definitions. For more information, see Appendix B: Accuracy versus Uncertainty.

# Sensor Types

### Cernox®
Cernox® sensors can be used from 100 mK to 420 K with good sensitivity over the whole range. They have a low magnetoresistance, and are the best choice for applications with magnetic fields up to 30 T (for temperatures greater than 2 K). Cernox® are resistant to ionizing radiation, and are available in robust mounting packages and probes. Because of their versatility, they are used in a wide variety of cryogenic applications, such as particle accelerators, space satellites, MRI systems, cryogenic systems, and research science.

### Silicon diodes
Silicon diodes are the best choice for general-purpose cryogenic use. The sensors are interchangeable (they follow a standard curve) and are available in robust mounting packages and probes. Silicon diodes are easy and inexpensive to instrument, and are used in a wide variety of cryogenic applications, such as cryo-coolers, laboratory cryogenics, cryo-gas production, and space satellites.

### Germanium
Germanium RTDs have the highest accuracy, reproducibility, and sensitivity from 0.05 K to 100 K. They are resistant to ionizing radiation, but are not recommended for use in magnetic fields. Germanium RTDs are used mostly in research settings when the best accuracy and sensitivity are required. Germanium and Ruthenium oxide are the only two sensors that can be used below 100 mK.

### Ultra low temperature Rox™
ULT ruthenium oxide RTDs can be used to below 10 mK. Along with germanium, they are the only sensors that can be used below 100 mK. Calibrations for these sensors are available down to 10 mK, and can include additional extrapolated points to 5 mK. Optical shielding of the RS package reduces unwanted sensor heating, making this sensor ideal for temperature monitoring or controlling below 50 mK.

### Interchangeable Rox™
These interchangeable ruthenium oxide temperature sensors are thick-film resistors. Each interchangeable Rox™ model adheres to a single resistance versus temperature curve. They are often used for applications that require a standard curve in magnetic fields, such as MRI systems. Their upper temperature range is limited to 40 K, and Cernox® are better in magnetic fields above 2 K.

### Platinum
Platinum RTDs are an industry standard. They follow an industry standard curve from 73 K to 873 K with good sensitivity over the whole range. Platinum RTDs can also be used down to 14 K. Because of their high reproducibility, they are used in many precision metrology applications. Platinum RTDs have limited packaging options, but they are inexpensive and require simple instrumentation. They are widely used in cryogenic applications at liquid nitrogen temperatures or greater.

### Capacitance
Capacitance sensors are ideally suited for use as temperature control sensors in strong magnetic fields because they exhibit virtually no magnetic field dependence. Small variations in the capacitance/temperature curves occur upon thermal cycling. It is recommended that temperature in zero field be measured with another temperature sensor, and that the capacitance sensor be employed as a control element only.

### Thermocouples
Thermocouples can be used over an extremely wide range and in harsh environmental conditions, and follow a standard response curve. Less accurate than other sensors, special techniques must be employed when using thermocouples to approach temperature accuracies of 1% of temperature. Thermocouples are used for their small size, extremely wide temperature range (exceeding high temperature limits of platinum RTDs), and simple temperature measurement methodology.

## Lake Shore calibrations

Lake Shore offers complete calibration services from 50 mK to 800 K. Above 0.65 K, Lake Shore calibrations are based on the International Temperature Scale of 1990 (ITS-90). For temperature below 0.65 K, calibrations are based on the Provisional Low Temperature Scale of 2000 (PLT-2000).

Each scale is maintained on a set of germanium, rhodium-iron, and/or platinum resistance secondary thermometers standards. These secondary standards are calibrated at various national labs: NIST, PTB, and NPL. Working thermometers are calibrated against, and routinely intercompared with these secondary standards. For PLTS-2000 calibrations, working sensors are also compared to a superconducting fixed-point set and nuclear orientation thermometer.

Lake Shore offers sensor calibrations down to 10 mK. Our enhanced ultra-low temperature calibration facility includes dilution refrigerators, a nuclear orientation thermometer, and a superconducting fixed point set.

All calibration reports include:

- Certificate of calibration
- Calibration test data and data plot
- Polynomial fit equations and fit comparisons
- Interpolation tables
- Instrument breakpoint tables and data files

| Lake Shore offers three classifications of calibration: | | |
|---|---|---|
| Good | Uncalibrated | Silicon diodes follow standard curve |
| | | Platinum resistors follow standard curve |
| | | Interchangeable Rox™ follow standard curve |
| | | Cernox®, germanium, and ULT Rox™ sensors can be purchased uncalibrated but must be calibrated by the customer |
| Better | SoftCal™ | An abbreviated calibration (2-point: 77 K and 305 K; or 3-point: 77 K, 305 K, and 480 K) that is available for platinum sensors |
| Best | Calibration | All sensors can be calibrated in various pre-defined temperature ranges for each sensor type. The digits represent the lower range in kelvin, and the letter corresponds to high temperature limit, where:<br>A = 6 K B = 40 K D = 100 K L = 325 K M = 420 K H = 500 K J = 800 K<br>For example: The calibration range “1.4L” would result in a sensor characterized from 1.4 K to 325 K. |


# Sensor Characteristics

## Sensor packages and characteristics

| | Sensor type/ packages | Temperature range | | Physical size[1] | Mass | Typical dimensionless sensitivity $S_D$ | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | low | high | | | 1.4 K | 4.2 K | 20 K | 77.4 K | 295 K | 475 K |
| Silicon diodes | DT-670-SD | 1.4 K | 500 K | 1.08 mm high × 1.905 mm wide × 3.175 mm long | 37 mg | -0.01 | -0.08 | -0.26 | -0.13 | -1.19 | -7.5 |
| | DT-670E-BR | 30 K | 500 K | 0.178 mm × 0.432 mm × 0.406 mm | 72.7 µg | -0.01 | -0.08 | -0.26 | -0.13 | -1.19 | — |
| Cernox® | CX-1010-BC | 0.1 K | 325 K | 3.175 mm × 8.89 mm × 7.620 mm | 3.0 mg | -0.68 | -0.49 | -0.44 | -0.56 | -0.65 | — |
| | CX-1010-SD | 0.1 K | 325 K | 1.08 mm high × 1.905 mm wide × 3.175 mm long | 40 mg | — | — | — | — | — | — |
| | CX-1010-AA | 0.1 K | 325 K | 3.048 mm dia. × 8.509 mm long | 400 mg | — | — | — | — | — | — |
| | CX-1030-BC | 0.30 K | 325 K | 3.175 mm × 8.89 mm × 7.620 mm | 3.0 mg | -1.15 | -0.71 | -0.56 | -0.63 | -0.64 | — |
| | CX-1030-SD-HT | 0.30 K | 420 K | 1.08 mm high × 1.905 mm wide × 3.175 mm long | 40 mg | — | — | — | — | — | — |
| | CX-1030-AA | 0.30 K | 325 K | 3.048 mm dia. × 8.509 mm long | 400 mg | — | — | — | — | — | — |
| | CX-1050-BC | 1.4 K | 325 K | 3.175 mm × 8.89 mm × 7.620 mm | 3.0 mg | -2.5 | -1.3 | -0.9 | -0.91 | -0.87 | — |
| | CX-1050-SD-HT | 1.4 K | 420 K | 1.08 mm high × 1.905 mm wide × 3.175 mm long | 40 mg | — | — | — | — | — | — |
| | CX-1050-AA | 1.4 K | 325 K | 3.048 mm dia. × 8.509 mm long | 400 mg | — | — | — | — | — | — |
| | CX-1070-BC | 4.2 K | 325 K | 3.175 mm × 8.89 mm × 7.620 mm | 3.0 mg | — | -1.5 | -1 | -1 | -0.9 | — |
| | CX-1070-SD-HT | 4.2 K | 420 K | 1.08 mm high × 1.905 mm wide × 3.175 mm long | 40 mg | — | — | — | — | — | — |
| | CX-1070-AA | 4.2 K | 325 K | 3.048 mm dia. × 8.509 mm long | 400 mg | — | — | — | — | — | — |
| | CX-1080-BC | 20 K | 325 K | 3.175 mm × 8.89 mm × 7.620 mm | 3.0 mg | — | — | -1.5 | -1.4 | -1.2 | — |
| | CX-1080-SD-HT | 20 K | 420 K | 1.08 mm high × 1.905 mm wide × 3.175 mm long | 40 mg | — | — | — | — | — | — |
| | CX-1080-AA | 20 K | 325 K | 3.048 mm dia. × 8.509 mm long | 400 mg | — | — | — | — | — | — |
| Germanium | GR-50-AA | 0.05 K | 5 K | 3.048 mm dia. × 8.509 mm long | 355 mg | -0.74 | -0.32 | — | — | — | — |
| | GR-300-AA | 0.3 K | 100 K | 3.048 mm dia. × 8.509 mm long | 355 mg | -1.8 | -1.2 | -0.93 | -1.1 | — | — |
| | GR-1400-AA | 1.4 K | 100 K | 3.048 mm dia. × 8.509 mm long | 355 mg | -3.7 | -2.1 | -2.4 | -1.1 | — | — |
| ULT Rox™ | RX-102B-RS | 0.005 K | 40 K | 17.30 mm high × 7.21 mm wide × 7.21 mm long | 3.5 g | -0.16 | -0.11 | -0.12 | — | — | — |
| Interchangeable Rox™ | RX-102A-BR | 0.05 K | 40 K | 1.45 mm × 1.27 mm × 0.65 mm thick | 2.8 mg | -0.47 | -0.25 | -0.07 | — | — | — |
| | RX-102A-AA | 0.05 K | 40 K | 3.048 mm dia. × 8.509 mm long | 350 mg | -0.47 | -0.25 | -0.07 | — | — | — |
| | RX-202A-AA | 0.05 K | 40 K | 3.048 mm dia. × 8.509 mm long | 350 mg | -0.34 | -0.17 | -0.10 | — | — | — |
| | RX-103A-BR | 1.4 K | 40 K | 1.40 mm × 1.23 mm × 0.41 mm thick | 3.7 mg | -0.62 | -0.36 | -0.17 | — | — | — |
| | RX-103A-AA | 1.4 K | 40 K | 3.048 mm dia. × 8.509 mm long | 350 mg | -0.62 | -0.36 | -0.17 | — | — | — |
| Platinum | PT-102 | 14 K | 873 K | 2.007 mm dia. × 20.995 mm long | 250 mg | — | — | +0.74 | +1.6 | +1.1 | +1.0 |
| | PT-103 | 14 K | 873 K | 1.6 mm dia. × 12.192 mm long | 120 mg | — | — | +0.74 | +1.6 | +1.1 | +1.0 |
| | PT-111 | 14 K | 673 K | 1.8 mm dia. × 5 mm long | 52 mg | — | — | +0.74 | +1.6 | +1.1 | +1.0 |
| Capacitance | CS-501-GR | 1.4 K | 290 K | 3.048 mm dia. × 8. 484 mm long | 260 mg | +0.01 | +0.02 | +0.11 | +0.46 | -4.4 | — |
| Thermocouples | Type K | 3.2 K | 1543 K | 30 AWG (0.254 mm) and 36 AWG (0.127 mm) | NA | | | | | | |
| | Type E | 3.2 K | 953 K | 30 AWG (0.254 mm) and 36 AWG (0.127 mm) | | | | | | | |

[1] Adapters will increase thermal response times—see individual sensor specifications for thermal response times

## Sensor package size versus temperature sensor characteristics

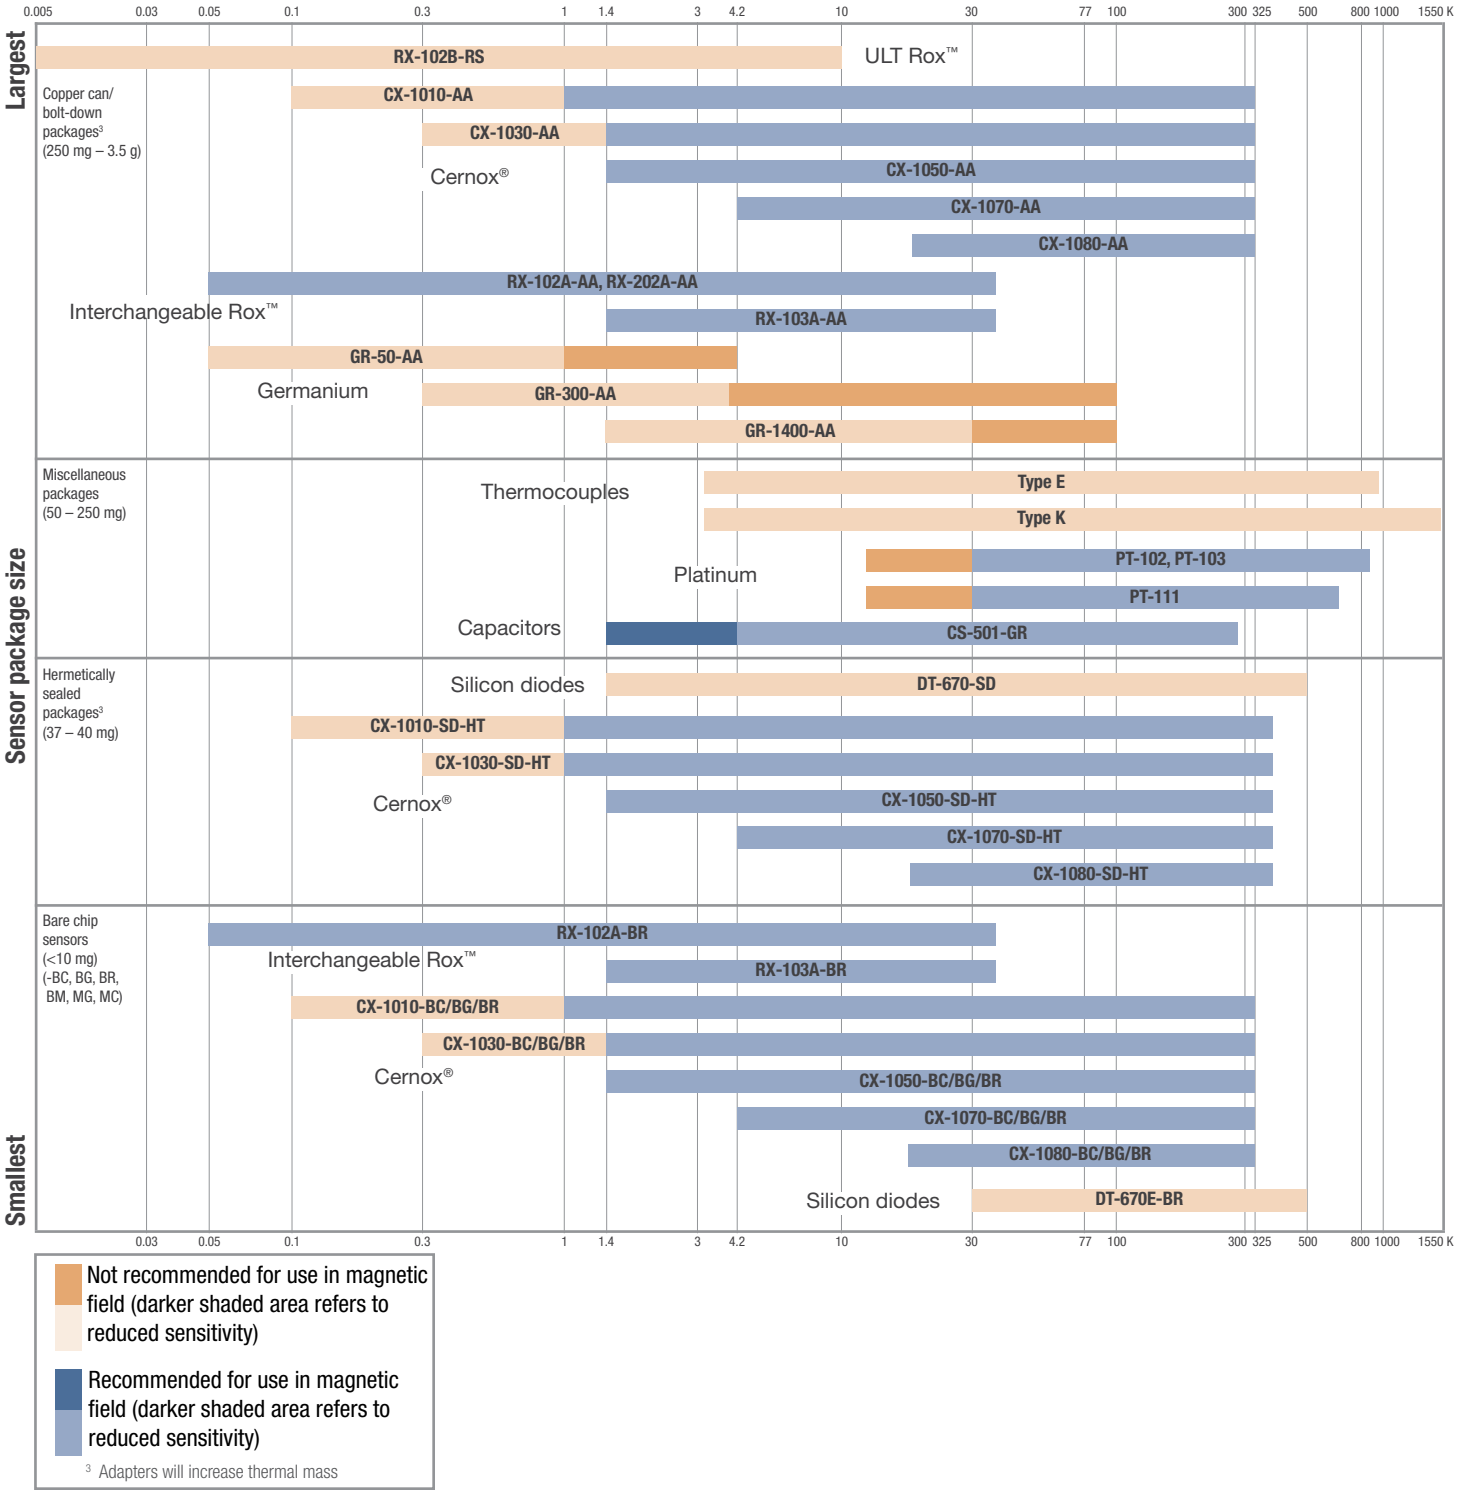


Not recommended for use in magnetic field (darker shaded area refers to reduced sensitivity)

Recommended for use in magnetic field (darker shaded area refers to reduced sensitivity)

[3] Adapters will increase thermal mass

## Short and long term sensor characteristics

| | Interchangeability | Typical reproducibility at 4.2 K | Typical long-term stability | |
|---|---|---|---|---|
| | | | Use to 305 K[4] | Use to 500 K[5] |
| Silicon diode | Yes—see page 18 | ±10 mK | 4.2 K: ±10 mK/yr<br>77 K: ±40 mK/yr<br>305 K: ±25 mK/yr | 4.2 K: ±40 mK/yr<br>77 K: ±100 mK/yr<br>305 K: ±50 mK/yr<br>500 K: ±150 mK/yr |
| Cernox® | No | ±3 mK | 1 K to 100 K: ±25 mK/yr<br>100 K to 300 K: 0.05% of T | |
| Germanium | No | ±0.5 mK | 4.2 K: ±1 mK/yr<br>77 K: ±10 mK/yr | |
| ULT Rox™ | No | ±15 mK | 4.2 K: ±30 mK/yr | |
| Interchangeable Rox™ | Yes | ±15 mK | 4.2 K: ±15 to 50 mK/yr (model dependent) | |
| Platinum | Yes—see page 18 | ±5 mK[6] | 77 K to 273 K: ±10 mK/yr | |
| Capacitance | No | ±0.01 K after cooling and stabilizing | ±1.0 K/yr | |
| Thermocouples | | | | |
| Type K | Yes—see ASTM standard | NA | NA | |
| Type E | Yes—see ASTM standard | NA | NA | |

[4] Long-term stability data is obtained by subjecting sensor to 200 thermal shocks from 305 K to 77 K
[5] Based on 670 h of baking at 500 K
[6] Platinum reproducibility tested at 77 K

## Sensor characteristics in various environments

| | Use in vacuum | | | Use in radiation[7] | Use in magnetic fields[7] |
|---|---|---|---|---|---|
| | High<br>$10^{-1}$ to $10^{-4}$ Pa | Very high<br>$10^{-4}$ to $10^{-7}$ Pa | Ultra high<br>$10^{-7}$ to $10^{-10}$ Pa | | |
| Silicon diode | DT-621 | — | DT-670-SD | Not recommended | Not recommended for T<60 K, or for B>5 tesla above 60 K SD package has magnetic leads |
| Cernox®[8] | AA can | — | Bare chip SD | Recommended | Excellent for use in magnetic fields 1 K and up SD package with non-magnetic leads |
| Germanium[8] | AA can | — | Bare chip | Recommended | Not recommended for use except at low B due to large orientation-dependent magnetic field effect |
| ULT Rox™ | RS | RS | — | Recommended | Not recommended for use in magnetic fields |
| Interchangeable Rox™ | AA can | — | Bare chip | Recommended | Excellent for use in magnetic fields |
| Platinum | PT-103 | PT-111 | — | Recommended | Moderately orientation dependent—suggested use only T ≥ 30 K |
| Capacitance | CS-501 | — | — | Not available | Recommended for control purposes |
| Thermocouples | Insulated wire | — | — | Recommended | Useful when T ≥ 10 K |

[7] See additional information in Appendix A: Overview of Thermometry

## Typical magnetic field-dependent temperature errors, ΔT/T (%), at B (magnetic induction)

| | T(K) | Magnetic flux density B 2.5 T | 8 T | 14 T | 19 T | Notes |
|---|---|---|---|---|---|---|
| Cernox® 1050 (CX series) | 2 | 1.3 | 3.1 | 3.9 | 5 | Best sensor for use in magnetic field (T > 1 K) |
| | 4.2 | 0.1 | -0.15 | -0.85 | -0.8 | |
| | 10 | 0.04 | -0.4 | -1.1 | -1.5 | |
| | 20 | 0.04 | 0.02 | -0.16 | -0.2 | |
| | 30 | 0.01 | 0.04 | 0.06 | 0.11 | |
| | 77 | 0.002 | 0.022 | 0.062 | 0.11 | |
| | 300 | 0.003 | 0.004 | 0.004 | 0.006 | |
| Rox™ 102A | 2 | -1.4 | -7.9 | -13 | -17 | Recommended for use over the 0.05 K to 40 K temperature range. Consistent behavior between devices in magnetic fields. |
| | 3 | -1.5 | -7 | -14 | -18 | |
| | 4 | -0.56 | -6.7 | -14 | -18 | |
| | 8 | -1.3 | -6.1 | -13 | -21 | |
| | 16 | -0.40 | -3.4 | -9.6 | -16 | |
| | 23 | -0.31 | -2.2 | -6.2 | -11 | |
| Rox™ 102B | 2 | 3.29 | 13.82 | 22.53 | 27.95 | |
| | 3 | 3.96 | 14.68 | 23.12 | 29.12 | |
| | 4 | 3.53 | 13.92 | 22.57 | 28.20 | |
| | 8 | 1.53 | 7.53 | 13.50 | 17.86 | |
| | 16 | 0.27 | 2.14 | 4.66 | 6.58 | |
| | 23 | 0.06 | 0.79 | 2.01 | 3.11 | |
| Rox™ 103A | 2 | 0.58 | 1.5 | 2.2 | 2.6 | Excellent for use in magnetic fields from 1.4 K to 40 K. Predictable behavior. |
| | 3 | 0.44 | 1.1 | 1.7 | 2.0 | |
| | 4 | 0.27 | 0.95 | 1.4 | 1.7 | |
| | 8 | 0.11 | 0.49 | 0.71 | 0.80 | |
| | 16 | 0.018 | 0.076 | 0.089 | 0.040 | |
| | 23 | 0.0051 | 0.0058 | -0.0060 | -.0.095 | |
| Rox™ 202A | 2 | -0.13 | -2.2 | -3.9 | -5.2 | Recommended for use over the 0.05 K to 40 K temperature range. Consistent behavior between devices in magnetic fields. |
| | 3 | 0.18 | -0.68 | -2.7 | -3.7 | |
| | 4 | 0.77 | 0.046 | -1.8 | -3.2 | |
| | 8 | -0.023 | 0.16 | -0.65 | -3.0 | |
| | 16 | 0.03 | 0.16 | -0.48 | -1.5 | |
| | 23 | -0.05 | -0.08 | -0.39 | -0.92 | |
| Platinum resistors (PT series) | 20 | 20 | 100 | 250 | — | Recommended for use when T ≥ 40 K. |
| | 40 | 0.5 | 3 | 6 | 8.8 | |
| | 87 | 0 .04 | 0.4 | 1 | 1.7 | |
| | 300 | <0.01 | 0.02 | 0.07 | 0.13 | |
| Capacitance CS-501-GR series | | ΔT/T(%) < 0.015 at 4.2 K and 18.7 tesla<br>ΔT/T(%) <0.05 at 77 K and 305 K and 18.7 tesla | | | | Recommended for control purposes. Monotonic in C vs. T to nearly room temperature. |
| Germanium resistors (GR series) | 2.0 | -8 | -60 | — | — | Not recommended except at low B owing to large, orientation-dependent temperature effect. |
| | 4.2 | -5 to -20 | -30 to -55 | -60 to -75 | — | |
| | 10 | -4 to -15 | -25 to -60 | -60 to -75 | — | |
| | 20 | -3 to -20 | -15 to -35 | -50 to -80 | — | |
| Type E thermocouples (chromel-constantan) | 10 | 1 | 3 | 7 | — | Useful when T ≥ 10 K. Refer to notes for Chromel-AuFe (0.07%). |
| | 20 | <1 | 2 | 4 | — | |
| | 455 | <1 | <1 | 2 | — | |

| | T(K) | 1 T | 2 T | 3 T | 4 T | 5 T | Notes |
|---|---|---|---|---|---|---|---|
| Silicon diodes Junction parallel to field (DT series) | 4.2 | -200 | -300 | -350 | -400 | -500 | Strongly orientation dependent. |
| | 20 | -10 | -20 | -25 | -30 | -40 | |
| | 40 | -4 | -6 | -8 | -10 | -12 | |
| | 60 | -0.5 | -1 | -2 | -3 | -3.5 | |
| | 80 | <0.1 | -0.5 | -0.8 | -1.1 | -1.5 | |
| | 300 | <0.1 | <-0.1 | <-0.1 | <-0.1 | <-0.1 | |
| Silicon diodes Junction perpendicular to field (DT series) | 4.2 | -8 | -9 | -11 | -15 | -20 | Strongly orientation dependent. |
| | 20 | -4 | -5 | -5 | -5 | -10 | |
| | 40 | -1.5 | -3 | -4 | -5 | -5.5 | |
| | 60 | -0.5 | -1 | -2 | -3 | -3.5 | |
| | 80 | -0.1 | -0.3 | -0.5 | -0.6 | -0.7 | |
| | 300 | <0.1 | 0.2 | 0.5 | 0.6 | 0.6 | |

### Typical accuracy* (interchangeability): uncalibrated sensors

| | 0.05 K | 0.5 K | 1.4 K | 2 K | 4.2 K | 10 K | 20 K | 25 K | 40 K | 70 K | 100 K | 305 K | 400 K | 500 K | 670 K |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **Silicon diode** | | | | | | | | | | | | | | | |
| DT-670-SD, Band A | — | — | — | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.5 K | ±0.5 K | ±0.5 K | — |
| DT-670-SD, Band B | — | — | — | ±0.5 K | ±0.5 K | ±0.5 K | ±0.5 K | ±0.5 K | ±0.5 K | ±0.5 K | ±0.5 K | ±0.5 K | ±0.33% of temp | ±0.33% of temp | — |
| DT-670-SD, Band C | — | — | — | ±1.0 K | ±1.0 K | ±1.0 K | ±1.0 K | ±1.0 K | ±1.0 K | ±1.0 K | ±1.0 K | ±1.0 K | ±0.5% of temp | ±0.5% of temp | — |
| DT-670-SD, Band D | — | — | — | — | — | — | — | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.50 K | ±0.2% of temp | ±0.2% of temp | — |
| DT-670-SD, Band E | — | — | — | — | — | — | — | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25% of temp | ±0.25% of temp | ±0.25% of temp | — |
| **Platinum** | | | | | | | | | | | | | | | |
| PT-102 | — | — | — | — | — | — | — | — | — | ±1.3 K | ±1.2 K | ±0.5 K | ±0.9 K | ±1.4 K | ±2.3 K |
| PT-103 | — | — | — | — | — | — | — | — | — | ±1.3 K | ±1.2 K | ±0.5 K | ±0.9 K | ±1.4 K | ±2.3 K |
| PT-111 | — | — | — | — | — | — | — | — | — | ±1.3 K | ±1.2 K | ±0.5 K | ±0.9 K | ±1.4 K | ±2.3 K |
| **Rox™** | | | | | | | | | | | | | | | |
| RX-102A-AA | ±10 mK | ±25 mK | ±50 mK | ±75 mK | ±125 mK | ±300 mK | ±1.25 K | ±1.5 K | ±4.0 K | — | — | — | — | — | — |
| RX-102A-AA-M | ±5 mK | ±20 mK | ±25 mK | ±40 mK | ±75 mK | ±200 mK | ±500 mK | ±750 mK | ±1.5 K | — | — | — | — | — | — |
| RX-202A-AA | ±15 mK | ±30 mK | ±100 mK | ±125 mK | ±250 mK | ±1 K | ±2.5 K | ±3 K | ±5.0 K | — | — | — | — | — | — |
| RX-202A-AA-M | ±10 mK | ±25 mK | ±50 mK | ±75 mK | ±150 mK | ±500 mK | ±1.0 K | ±1.5 K | ±2.0 K | — | — | — | — | — | — |
| RX-103A-AA | — | — | ±150 mK | ±180 mK | ±400 mK | ±1 K | ±2.0 K | ±2.5 K | ±4.0 K | — | — | — | — | — | — |
| RX-103A-AA-M | — | — | ±50 mK | ±75 mK | ±100 mK | ±300 mK | ±700 mK | ±1 K | ±1.5 K | — | — | — | — | — | — |

### Typical accuracy*: SoftCal™ (2-point and 3-point soft calibration sensors)

| | 2 K | 4.2 K | 10 K | 30 K | 70 K | 305 K | 400 K | 475 K | 500 K | 670 K |
|---|---|---|---|---|---|---|---|---|---|---|
| **Platinum** | | | | | | | | | | |
| PT-102-2S[9] | — | — | — | — | ±0.25 K | ±0.25 K | ±0.9 K | ±1.3 K | ±1.4 K | ±2.3 K |
| PT-103-2S[9] | — | — | — | — | ±0.25 K | ±0.25 K | ±0.9 K | ±1.3 K | ±1.4 K | ±2.3 K |
| PT-111-2S[9] | — | — | — | — | ±0.25 K | ±0.25 K | ±0.9 K | ±1.3 K | ±1.4 K | ±2.3 K |
| PT-102-3S[10] | — | — | — | — | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±1.4 K | ±2.3 K |
| PT-103-3S[10] | — | — | — | — | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±1.4 K | ±2.3 K |
| PT-111-3S[10] | — | — | — | — | ±0.25 K | ±0.25 K | ±0.25 K | ±0.25 K | ±1.4 K | ±2.3 K |

[9]2S (2-point at 77 K and 305 K)
[10]3S (3-point at 77 K, 305 K, and 480 K)

**The use of the terms accuracy and uncertainty throughout this catalog are used in the more general and conventional sense as opposed to following the strict metrological definitions. For more information, see Appendix B: Accuracy versus Uncertainty, page 156.*

## Typical accuracy*: calibrated sensors (in mK)[12]

| | Temperature | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 0.05 K | 0.1 K | 0.3 K | 0.5 K | 1 K | 1.4 K | 4.2 K | 10 K | 20 K | 77 K | 300 K | 400 K | 500 K |
| **Silicon diode** | | | | | | | | | | | | | |
| DT-670 | — | — | — | — | — | ±21 mK | ±12 mK | ±12 mK | ±14 mK | ±34 mK | ±35 mK | ±50 mK | ±54 mK |
| **Cernox®** | | | | | | | | | | | | | |
| CX-1010 | — | ±4 mK | ±4 mK | ±4 mK | ±5 mK | ±5 mK | ±5 mK | ±6 mK | ±11 mK | ±25 mK | ±79 mK | ±125 mK | — |
| CX-1030 | — | — | ±4 mK | ±4 mK | ±5 mK | ±5 mK | ±5 mK | ±6 mK | ±9 mK | ±25 mK | ±75 mK | ±96 mK | — |
| CX-1050 | — | — | — | — | — | ±5 mK | ±5 mK | ±6 mK | ±9 mK | ±16 mK | ±49 mK | ±77 mK | — |
| CX-1070 | — | — | — | — | — | — | ±5 mK | ±6 mK | ±9 mK | ±16 mK | ±48 mK | ±75 mK | — |
| CX-1080 | — | — | — | — | — | — | — | — | ±9 mK | ±16 mK | ±40 mK | ±65 mK | — |
| **Rox™** | | | | | | | | | | | | | |
| RX-102A/103A/202A | ±4 mK | ±4 mK | ±4 mK | ±4 mK | ±5 mK | ±5 mK | ±17 mK | ±22 mK | ±38 mK | — | — | — | — |
| **Platinum** | | | | | | | | | | | | | |
| PT-103/111 | — | — | — | — | — | — | — | — | ±10 mK | ±12 mK | ±26 mK | ±48 mK | ±58 mK |
| **Germanium** | | | | | | | | | | | | | |
| GR-50/300/1400 | ±5 mK | ±5 mK | ±5 mK | ±5 mK | ±6 mK | ±6 mK | ±6 mK | ±4 mK | ±8 mK | ±25 mK | — | — | — |


[12]All accuracies are: 2 σ figures; $[(\text{calibration uncertainty})^2 + (\text{reproducibility})^2]^{0.5}$; for additional information, please see Appendix D.

# Sensor Packages and Mounting Adapters


Temperature sensors are available in a variety of packages to facilitate mounting. Included are adapters that allow the sensor to be soldered in place, screwed on, bolted down, inserted into a hole, or inserted through a pressure seal in the form of a thermowell. Gold-plated copper bobbins are available for both diodes and resistors in order to heat sink leads. The chart below summarizes the standard Lake Shore sensor and packaging configurations. Appendix C: Sensor Packaging and Installation discusses techniques for the correct installation of temperature sensors. More specific installation notes are included for the bare chip sensors, the SD package, and the CU, DI, CY, and CD adapters. Special packaging is also available—consult Lake Shore for custom orders.

| Packaging *(see individual sensor pages for additional details)* | Silicon diode | Cernox® | Germanium | Interchangeable Rox™ | PT-103 | PT-111 | Installation instructions |
|---|---|---|---|---|---|---|---|
| **Common** | | | | | | | |
| Bare chip sensors<br>BC Bare chip with 2 copper leads (42 AWG) | | ■ | | | | | Appendix C |
| BG Bare chip with 2 or 4 gold leads | | ■ | | | | | Appendix C |
| BR Bare chip, no leads | | ■ | | ■ | | | Appendix C |
| Hermetically sealed package<br>SD | ■ | ■ | | | | | Appendix C |
| Mounting adapters for SD<br>CO Clamp | ■ | ■ | | | | | Appendix C |
| ET Screw-in | ■ | ■ | | | | | Order from Lake Shore |
| MT Screw-in (metric) | ■ | ■ | | | | | Order from Lake Shore |
| CU Copper bobbin (small, 4-lead) | ■ | ■ | | | | | Appendix C |
| DI Copper bobbin (small, 2-lead) | ■ | | | | | | Appendix C |
| CY Copper bobbin (large, 2-lead) | ■ | | | | | | Appendix C |
| LR Half-rounded cylinder | ■ | ■ | | | | | Order from Lake Shore |
| BO Beryllium oxide heat sink block | ■ | ■ | | | | | Order from Lake Shore |
| Platinum mounting adapter<br>AM | | | | | ■ | | Order from Lake Shore |
| Copper canister package<br>AA | | ■ | ■ | ■ | | | Appendix C |
| CD Copper bobbin | | ■ | ■ | ■ | | | Appendix C |
| **Unique packages** | | | | | | | |
| See individual sensor specifications | | | | ■ | ■ | ■ | Order from Lake Shore |


## Packages

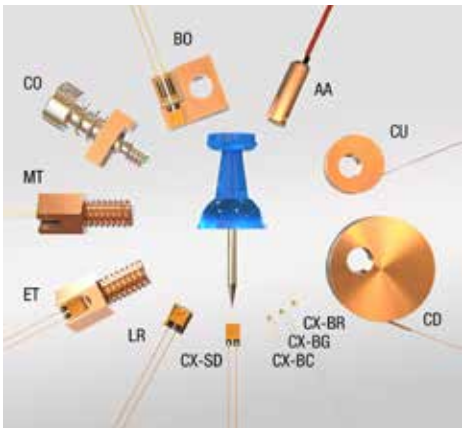


*Cernox® packages*

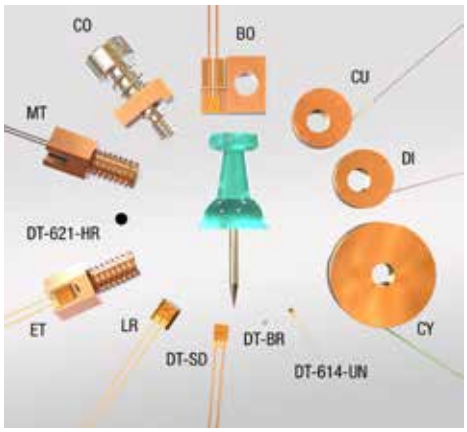



*Silicon diode packages*

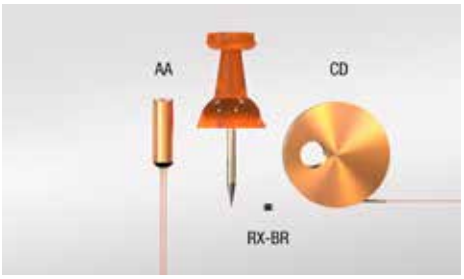


*Interchangeable Rox™ packages*




*Ultra low temperature Rox™ package*

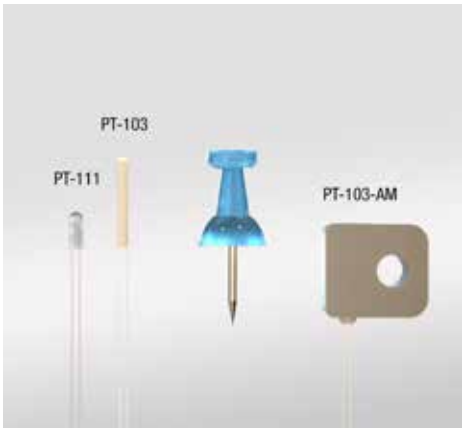


*Platinum packages*




*Capacitance package*


### Unique packages

*see individual sensor pages*

| | |
|---|---|
| PT-103 | CX-10XX-BC |
| PT-111 | CX-10XX-BG |
| | CX-10XX-BR |
| | RX-102B-RS |

# The Lake Shore Hermetically Sealed SD Package


### SD



- Small package designed primarily for bonding or clamping to a flat surface
- Indium, silver epoxy, 2850 Stycast® epoxy, or a CO clamp may be used for mounting


| | |
|---|---|
| Leads: | 2 |
| Lead material: | Silicon diode: brazed Kovar<br>Cernox®: gold-plated copper welded or soldered with 60/40 SnPb |
| Mass: | 0.03 g |
| Limitation: | The useful upper temperature limit of this configuration is 500 K |

### SD (Cernox®)





### The Lake Shore SD package—the most rugged, versatile package in the industry

The SD package, with its sapphire base, direct sensor-to-sapphire mounting, hermetic sealing, and brazed Kovar leads provides the industry's most rugged, versatile sensors with the best thermal connection between the sample and sensor chip. In addition, this package is designed so heat coming down the leads bypasses the sensor chip. It can survive several thousand hours at 500 K and is compatible with most ultra high vacuum applications, and can be indium soldered to samples.The Lake Shore SD package is now available with Cernox® resistors as well as silicon diodes. For Cernox resistors the Kovar leads are replaced with nonmagnetic leads.

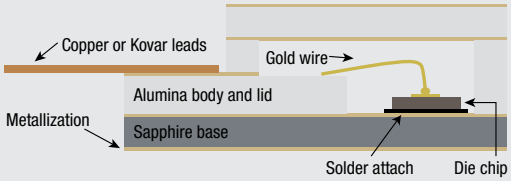

# Mounting adapters for SD package—CO, CU, DI, CY, LR, BO, ET, MT


## CO




- Spring-loaded clamp holds standard SD sensor in contact with the surface of the sample and allows the sensor to be easily changed or replaced
- Extra clamps are available for frequent relocation of the sensor
- 4-40 stainless steel screw has a formed shoulder, thus applying correct pressure to the clamp

| | |
|---|---|
| Adapter material: | Gold-plated copper (nickel strike); spring is ASTM A313 302 Austenitic steel |
| Leads: | See SD package |
| Lead material: | See SD package |
| Mass: | 1.8 g (including SD package and clamp) |
| Limitation: | The useful upper temperature limit of this configuration is 500 K |

## CU/CU-HT & DI



### CU


- SD packaged sensor indium-soldered into a flat copper bobbin with the leads thermally anchored to that same bobbin
- HT (high temperature) version is soldered using high temperature (90% Pb, 10% Sn) solder
- Can be mounted to any flat surface with a 4-40 screw

### DI

- 2-lead version of the CU

| | |
|---|---|
| Adapter material: | Gold-plated copper bobbin (SD indium-soldered to adapter and wrapped in Stycast® epoxy); high temperature CU uses high temperature (90% Pb, 10% Sn) solder |
| CU leads: | Four 0.91 m (36 in), 36 AWG, color-coded Quad-Lead™ |
| DI leads: | 0.91 m (36 in), 36 AWG, color-coded, 2-lead ribbon cable |
| Lead material: | Phosphor bronze alloy |
| Mass: | 1.1 g (including SD package and bobbin, excluding leads) |
| Limitation: | The epoxy limits the upper useful temperature of this configuration to 378 K (high temperature CU-HT upper temperature limit is 420 K with Cernox® and 500 K with silicon diodes) |


## CY




- Similar to the DI package, except the bobbin is larger in diameter with a centered mounting hole
- Relatively large-sized, robust

| | |
|---|---|
| Adapter material: | Gold-plated copper bobbin (SD indium-soldered to adapter and wrapped in Stycast® epoxy) |
| Leads: | Two 0.91 m (36 in), 30 AWG Teflon®-coated leads |
| Lead material: | Stranded copper |
| Mass: | 4.3 g (Including SD package and bobbin, excluding leads) |
| Limitation: | The epoxy limits the upper useful temperature of this configuration to 400 K |


## LR




- With an SD packaged sensor mounted on a slightly-more-than half-rounded cylinder, this package is designed to be inserted into a 3.2 mm (1/8 in) diameter hole

| | |
|---|---|
| Adapter material: | Gold-plated flat cylindrical copper disk (SD indium-soldered to adapter) |
| Leads: | See SD package |
| Lead material: | See SD package |
| Mass: | 0.2 g (Including SD package and disk) |
| Limitation: | Indium solder limits the upper useful temperature of this configuration to 420 K |


## BO




- SD package is soldered to a mounting block and the leads are thermally anchored (without epoxy) to the block via a beryllium oxide insert
- Since leads can be a significant heat path to the sensing element and can lead to measurement errors when incorrectly anchored, this configuration helps maintain the leads at the same temperature as the sensor

| | |
|---|---|
| Adapter material: | Gold-plated bolt-on copper block with leads thermally anchored to block (SD indium-soldered to adapter) |
| Leads: | See SD package |
| Lead material: | See SD package |
| Mass: | 1.5 g (including SD package and mounting block) |
| Limitation: | Indium solder limits the upper useful temperature of this configuration to 420 K |


## ET




- Convenient screw-in package formed by indium-soldering a basic SD configuration into a recess in one flat of a hexagonal screw head
- The head terminates in a standard SAE 6-32 threaded stud allowing the sensor to be threaded into a mounting hole in the sample

| | |
|---|---|
| Adapter material: | ET: gold-plated copper SAE-threaded screw head #6-32<br>MT: gold-plated copper metric threaded screw head 3 mm × 0.5 metric |
| Leads: | See SD package |
| Lead material: | See SD package |
| Mass: | 1.5 g (including SD package and screw head) |
| Limitation: | Indium solder limits the upper useful temperature of this configuration to 420 K |

## MT





- The MT package is similar to the ET version except the SD package is mounted in a slot in the center of the hexagonal head and the stud is a 3 mm × 0.5 metric thread

***Note:*** *A light coating of vacuum grease on the threads further enhances the thermal contact between the sensor package and the sample.*


# Copper canister packages

## AA



- Used with Cernox®, germanium, and Rox™ sensors

## B




- Used only with germanium sensors

| | |
|---|---|
| Adapter material: | Gold-plated cylindrical copper canister, BeO header, Stycast® epoxy |
| Leads: | Four 32 AWG × 152 mm (6 in) long (Rox™: Two 32 AWG × 152 mm [6 in] long) |
| Lead material: | Phosphor bronze insulated with polyimide (Rox™: copper insulated with Formvar®) |
| Mass: | AA canister (empty): 0.091 g<br>B canister (empty): 0.080 g<br>Once sensors are installed, total mass increases to 0.197 g to 0.416 g. Refer to individual sensor specifications. |
| Limitation: | The epoxy limits the upper useful temperature of this configuration to 400 K |

## Mounting adapter for AA canister package

## CD




- AA canister sensor soldered into a flat, copper bobbin with the sensor leads thermally anchored to the bobbin
- Can be mounted to any flat surface with a 6-40 screw (not supplied)
- Used with Cernox®, Germanium, and Rox™ sensors

| | |
|---|---|
| Adapter material: | Copper bobbin, gold-plated (AA canister epoxied to bobbin with Stycast® epoxy) |
| Leads: | 0.91 m (36 in), 36 AWG, color-coded, Quad-Lead™ |
| Lead material: | Phosphor bronze Grade A alloy |
| Limitation: | The epoxy limits the upper useful temperature of this configuration to 378 K |

## Mounting adapter for platinum RTDs

## PT-103-AM




- PT-103 mounted into a flat aluminum block
- Can be mounted to any flat surface with a 6-32 or M3 screw (not included) and Inconel® Belleville washer (included)

| | |
|---|---|
| Adapter material: | 6061 Al block (PT mounted to adapter using Cotronics Durabond® 950 Al-based adhesive) |
| Leads: | Two 0.010-inch diameter; 15.240 ±1.270 mm (0.600 ±0.050 in) long |
| Lead material: | Platinum |
| Mass: | 2.1 g |
| Limitation: | The aluminum alloy limits the upper useful temperature of these configurations to 800 K |

# Lead Extensions

(formerly SMODs)

Adding extra wire to your sensor leads can be cumbersome and time consuming. Lake Shore offers this service for you at the time of order, allowing numerous options to best suit your application.

There are various options available when selecting a lead extension:

### Number of wires

4-wire: For accurate sensor measurements, 4-lead connections are by far the superior option when adding a lead extension to both diodes and resistive temperature sensors. See Appendix C and Appendix E for additional information.

2-wire: This option is useful if the number of electrical connections inside a system must be kept to a minimum. However, 2-lead connections add measureable resistance to sensor measurements as described in Appendix E. This additional resistance will cause a significant (but repeatable) shift on all sensors except diodes.

### Wire type

Phosphor bronze: This all-purpose cryogenic wire has a great balance of features.

- Low thermal conductivity minimizes heat leak (lower is generally better)
- Moderate electrical resistance (lower is generally better)
- Non-ferromagnetic and very low magnetoresistance, making this wire the best choice for applications where magnetic fields are present
- Available in several convenient configurations in addition to single strand, such as Quad-Lead™ and Quad-Twist™

Manganin: This wire has several interesting characteristics that make it useful in certain situations.

- Coefficient of thermal expansion very close to that of pure copper
- Very low thermal conductivity minimizes heat leak (lower is generally better)
- Somewhat high electrical resistance (lower is generally better)
- Heavy Formvar® insulation limits upper temperature of wire to 378 K
- Non-ferromagnetic
- Available as single strand wire only

### Wire gauge

| Wire gauge (AWG) | Wire diameter (in) | Wire diameter (mm) |
|---|---|---|
| 30 | 0.01 | 0.255 |
| 32 | 0.00795 | 0.202 |
| 36 | 0.0055 | 0.127 |
| 42 | 0.0025 | 0.0635 |

Various wire thicknesses are available, depending on the wire type selected. The wire gauge selection process usually involves a compromise between thermal conductivity and ease-of-use, with thinner wire being preferred to reduce thermal conductivity and thicker wire being easier to handle and work with. Lake Shore uses American wire gauge (AWG) for its wire. This conversion table is provided for your convenience.

32 AWG and 36 AWG are our preferred wire gauges to use with cryogenic sensors. By far they provide the best balance between reduced thermal conductivity and ease-of-use.

Manganin is the only wire type available in 30 AWG as the extremely low thermal conductivity of the wire helps compensate for the “large” cross-sectional area associated with 30 AWG.

Phosphor bronze is the only wire type available in 42 AWG. This wire thickness reduces thermal conductivity substantially to the levels possible with manganin, with the same low magentoresistance of phosphor bronze. Unfortunately, this wire is extremely delicate and can break easily. Lake Shore suggests this wire be ordered only by users with extensive experience with system wiring.

### Wire length

Standard lengths of 2 m and 5 m are offered with all wire types and gauges. These lengths have been selected to suit a wide range of applications, most commonly wiring from a temperature sensor through the various stages of a cryostat, up to and terminating at an electrical feedthrough. Additional wire may be trimmed from both of these wire lengths if necessary. However, if a custom length is required, please contact Lake Shore to discuss custom wire lengths.

### Component temperature limits

The lead extention components have different maximum temperatures. Use this chart to ensure the lead extensions you order are appropriate for your given application.

| Lead extension component | Maximum temperature |
|---|---|
| Formvar | 378 K (105 °C) |
| Bond Coat 999 | 433 K (160 °C) |
| Polyimide | 500 K (227 °C) |
| 63/37 Solder | 450 K (177 °C) |
| 90/10 Solder | 548 K (275 °C) |

### Recommended standard lead extensions

Lake Shore recommends selecting from one of these two configurations — our most popular configurations due to the wide range of applications they cover.

**-QL**

Quad-Lead™ phosphor bronze, 32 AWG, 2 m
For situations where ease-of-use and ruggedness is important.

- 32 AWG wire is easier to prepare and solder to that thinner gauges
- Quad-lead™ wire is easy to heat-sink around copper bobbins due to its ribbon structure
- Polyimide insulation is strong and is resistant to solvents, and also has a high temperature rating that protects it from heating that might be applied to help soften the bonding agent used to join the wires to one another

**-QT**

Quad-Twist™ phosphor bronze, 36 AWG, 2 m
For noisy environments where signal integrity must be protected.

- Quad-twist™ wire helps reject electromagnetic interference that may be present inside the measurement space
- 32 AWG wire is easier to prepare and solder to that thinner gauges
- Quad-twist™ can be slightly more difficult to heat-sink, but the 36 AWG wire reduces thermal conductivity and therefore reduces heat-leak naturally
- Formvar® insulation has excellent mechanical properties such as abrasion resistance and flexibility, which is important when using 36 AWG wire. However, care should be taken as Formvar® can craze when exposed to solvents.

There are certain scenarios where these standard offerings are not adequate and alternative solutions should be selected. One such example is higher-temperature applications above 450 K where both Quad-Lead™ wire and Formvar® insulation become inappropriate. This application would require Quad-Twist, 32 AWG. In this scenario, please use the full part configurations to define the lead extension.

**-XXYY-Z**

**XX** = Wire type

**YY** = Wire gauge (AWG)

**Z** = Length in meters

### Method of ordering

When ordering a lead extension on the website, add the sensor to the shopping cart first, and then come to this page to add a lead extension.

If placing a purchase order, please append the lead extension part number to the sensor that requires the extension. Examples:

| | |
|---|---|
| CX-1050-SD-HD-4L-**QL** | Quad-Lead™, 32 AWG, 2 m |
| DT-670-CU-HT-1.4L-**QT** | Quad-Twist™, 36 AWG, 2 m attached to 0.91 m of Quad-Twist™, 36 AWG wire that comes standard with the diode CU-HT package. |
| PT-102-14L-QT32-**5** | Quad-Twist™, 32 AWG, 5 m |
| DT-670C-SD-DT32-**2** | Duo-Twist™, 32 AWG, 2 m |

*Lead extensions are not available on devices with gold or no leads*

For more information please visit www.lakeshore.com.